

TX-6070RGBLLAC50FC120-NUVENG-02

PRODUCT SPECIFICATION

Features:

- ◆Excellent transiting heat from LED chip operating under R/G/B/L1/L2/A/C:IF=1.0 A
- ◆High luminous output
- ◆Encapsulated materials are environmentally certified and meet environmental requirements.

Chip Material:

- ◆Red:AlInGaP
- ◆Green: GaInN
- ◆Blue:GaInN
- ◆ Lime:GaInN
- ◆PC Amber:GaInN
- ◆Cyan:GaN


Emitting Color:

- ◆Red (R)
- ◆Green (G)
- ◆Blue (B)
- ◆Lime (L1/L2)
- ◆PC Amber (A)
- ◆Cyan (C)

Applications:

- ◆Auxiliary lighting
- ◆Ambient lighting
- ◆Architectural lighting
- ◆Entertainment lighting
- ◆Stage lighting

Package Dimensions:

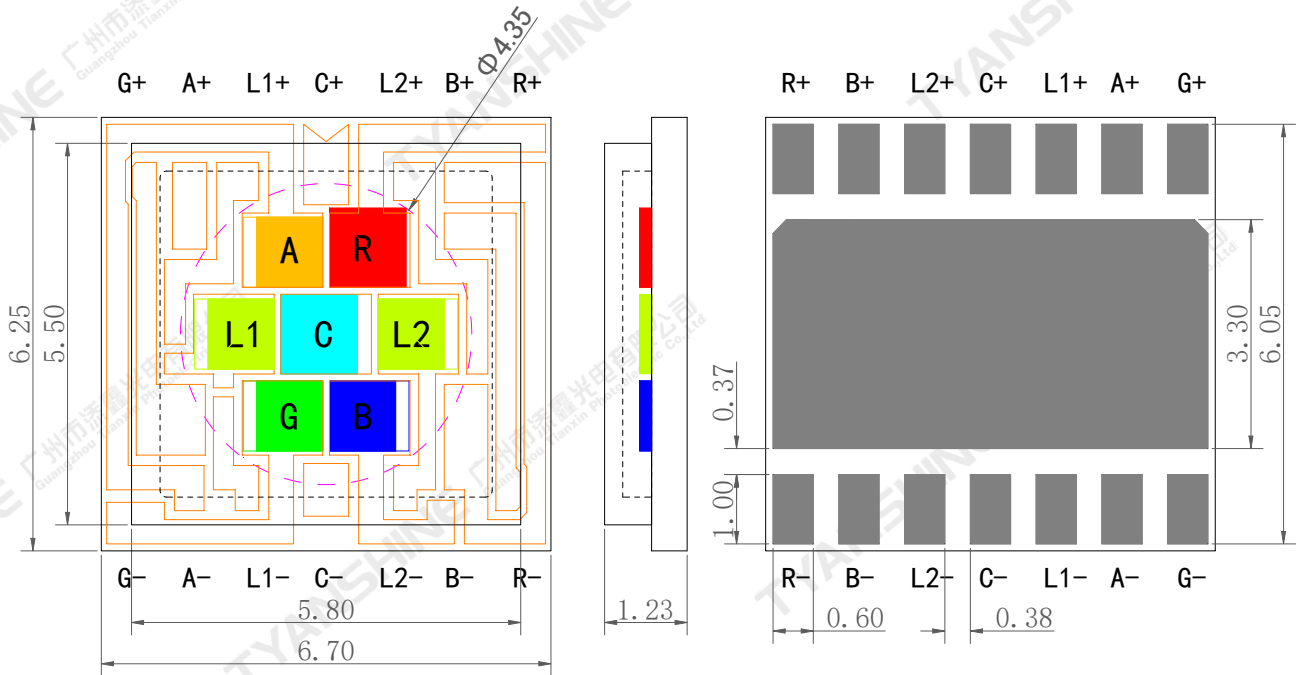

Notes:

- 1.All dimensions are in millimeters .
- 2.Tolerances unless otherwise mentioned are $\pm 0.1\text{mm}$.

Absolute Maximum Ratings (Tc=25°C)

Parameter	Symbol	Max Ratings	Unit	
Forward Current	IF	R	1.8	A
		G	2.5	
		B	2.5	
		L1	2.0	
		L2	2.0	
		A	2.0	
		C	1.8	
Reverse Voltage	VR	Not designed for reverse operation	V	
Power Dissipation	PD	R	5.4	W
		G	9.0	
		B	9.0	
		L1	7.2	
		L2	7.2	
		A	7.2	
		C	6.4	
Junction Temperature	Tj	R	115	°C
		G	150	
		B	150	
		L1	150	
		L2	150	
		A	150	
		C	150	
Electrostatic Discharge Threshold (ESD)	ESD	2000	V	
Storage Temperature(Only for LED, not including packaging)	Tstg	-40~+85	°C	
Operation Temperature	Topr	-40~+85		

Notes:

- Specifications are subject to change without notice.
- The data on this specification is for reference only and the actual data is in accordance with the acknowledgment.
- Precautions for ESD:
STATIC SHIELD Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

Electrical Optical Characteristics (Tc=25°C)



Parameter	Symbol	Condition	Emitting Color	Min.	Typ.	Max.	Units
Luminous Flux	Φ_v	If=1A	R	95	—	130	lm
			G	220	—	300	
			B	40	—	52	
			L1	300	—	400	
			L2	300	—	400	
			A	150	—	210	
			C	95	—	130	
Dominant Wavelength	λ_d	If=1A	R	620	—	633	nm
			G	525	—	535	
			B	450	—	460	
			L1/L2	565	—	570	
			C	485	—	495	
Correlated Colour Temperature	CCT	If=1A	L1/L2	4250	—	4500	K
			A	1770	—	1850	
Peak-emission Wavelength	λ_p	If=1A	R	625	—	645	nm
			G	520	—	525	
			B	448	—	453	
			L1/L2	545	—	560	
			C	482	—	488	
Spectral Line Half-Width	$\Delta\lambda$	If=1A	R	12	17	22	nm
			G	28	33	38	
			B	14	19	24	
			L1/L2	106	111	116	
			A	85	90	95	
			C	22	27	32	
Forward Voltage	V_f	If=1A	R	2.0	2.5	3.0	V
			G	2.8	3.2	3.6	
			B	2.8	3.2	3.6	
			L1	2.8	3.2	3.6	
			L2	2.8	3.2	3.6	
			A	2.8	3.2	3.6	
			C	2.8	3.2	3.6	
Reverse Current	I_R	$V_R=5V$	—	—	—	—	μA
Viewing Angle at 50 % IV	$2\theta_{1/2}$	—	—	—	120	—	Deg

Thermal Resistance Junction to Case	R θ_{J-c}	If=1A	R	—	2.9	—	K/W
			G	—	2.9	—	
			B	—	2.9	—	
			L1	—	2.9	—	
			L2	—	2.9	—	
			A	—	2.9	—	
			C	—	2.9	—	
Temperature Coefficient of Voltage	V Δ F/T	If=1A	R	—	-3.65	—	mV/°C
			G	—	-1.02	—	
			B	—	-0.65	—	
			L1	—	-0.67	—	
			L2	—	-0.67	—	
			A	—	-1.98	—	
			C	—	-3.52	—	

Notes:

- 1.Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- 3.The dominant wavelength (λ_d) is derived from the CIE chromaticity diagram and represents the single wavelength which defines the color of the device.
- 4.Luminous flux measurement tolerance: $\pm 15\%$.
- 5.Forward voltage measurement tolerance: $\pm 0.15V$.





White light Color coordinate filing (If=1A, Tc=25°C)

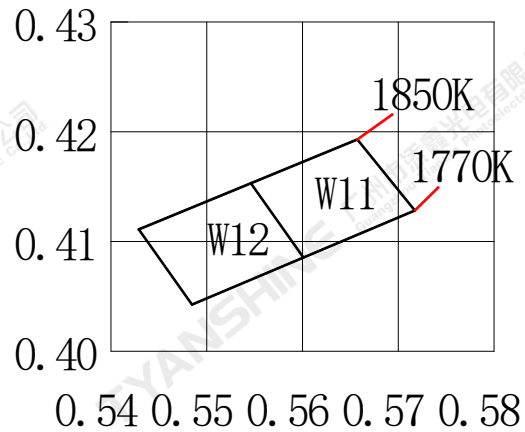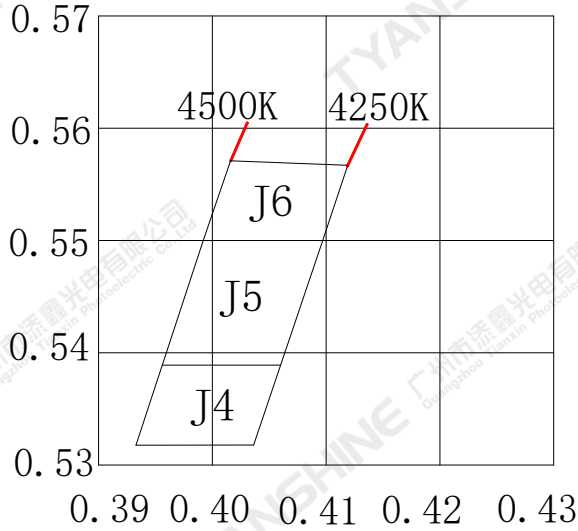


Grade	TC	P1		P2		P3		P4	
		X1	Y1	X2	Y2	X3	Y3	X4	Y4
J4	4250-4500K	0.4036	0.5318	0.4060	0.5389	0.3956	0.5389	0.3933	0.5318
J5	4250-4500K	0.4060	0.5389	0.4097	0.5500	0.3992	0.5500	0.3956	0.5389
J6	4250-4500K	0.4097	0.5500	0.4119	0.5567	0.4016	0.5571	0.3992	0.5500
W11	1770-1850K	0.5546	0.4154	0.56	0.4088	0.5718	0.413	0.5658	0.4194
W12	1770-1850K	0.5429	0.4112	0.5485	0.4044	0.56	0.4088	0.5546	0.4154

Typical Electrical/Optical Characteristics Curves

(25°C Ambient Temperature Unless Otherwise Noted)

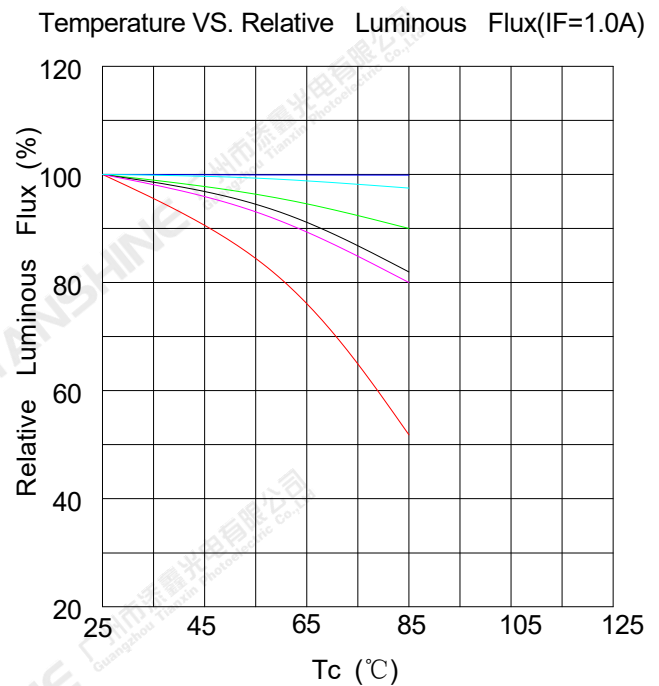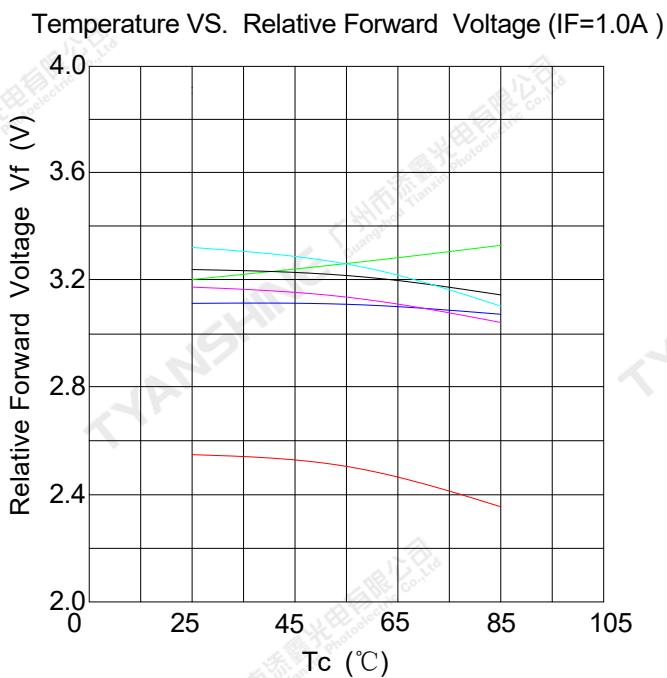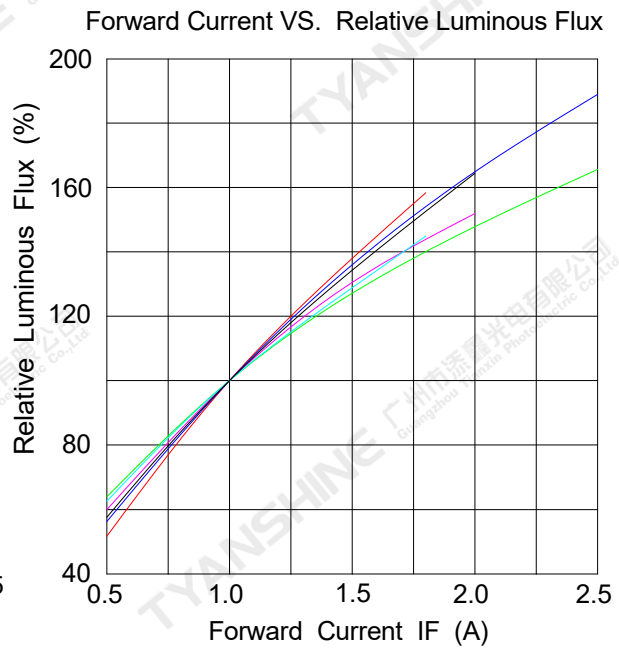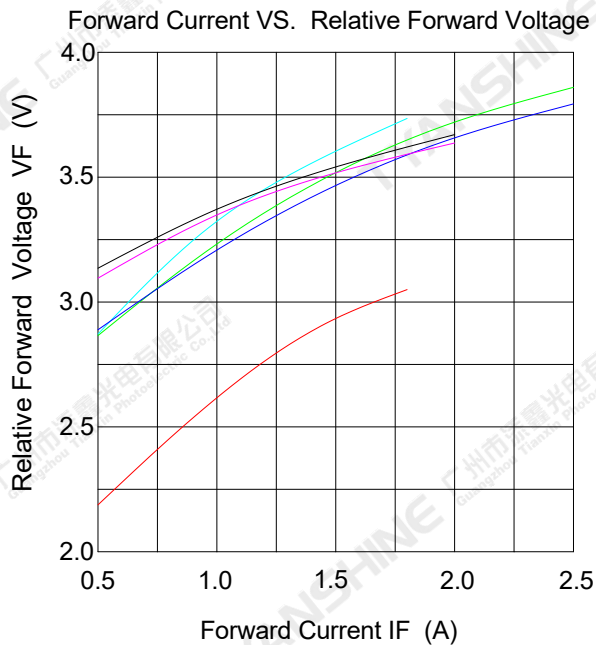

Notes: ■ Red; ■ Green; ■ Blue; ■ Lime(L1/L2); ■ PC Amber; ■ Cyan;

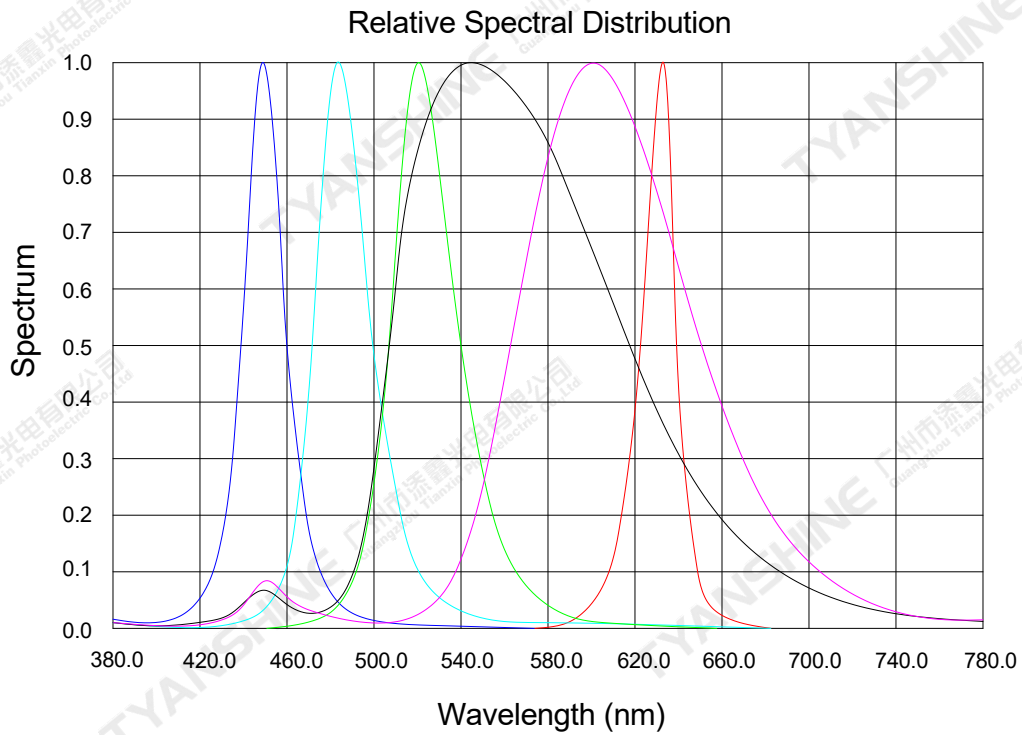

Notes: — Red; — Green; — Blue; — Lime(L1/L2); — PC Amber; — Cyan;

Notes:

1. $2\theta_{1/2}$ is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.
2. View angle tolerance is $\pm 5^\circ$.


Usage Precautions

Storage Environment Condition

Temperature: 5°C ~ 30°C (41°F ~ 86°F)

Humidity: 60% RH Max.

Soldering Condition

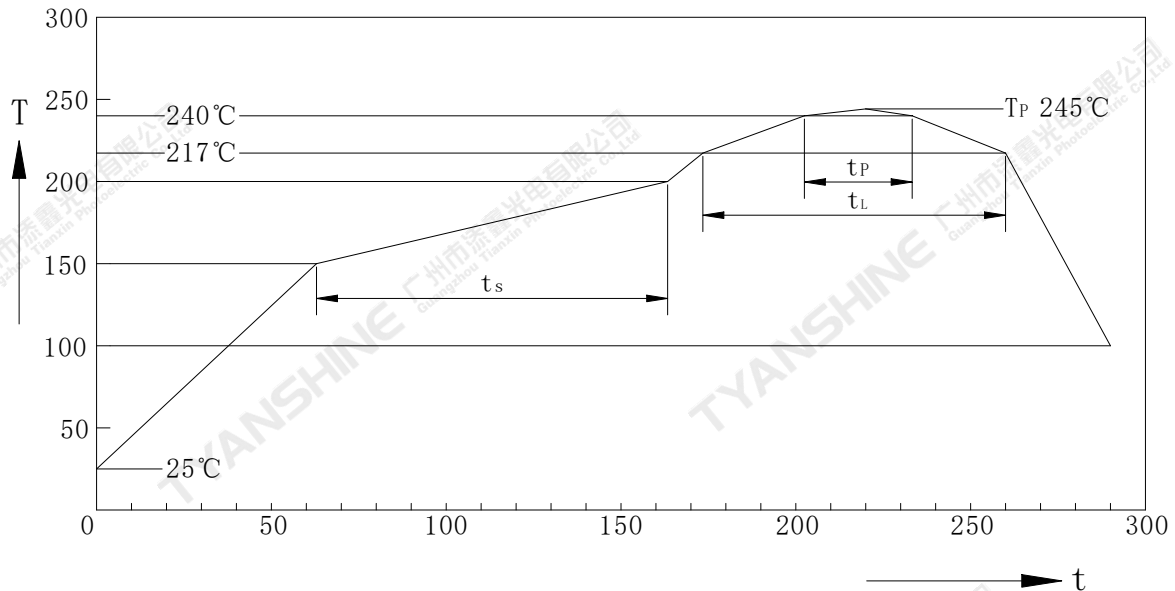



Profil-Charakteristik Profile Feature	Symbol	Pb-Free(SnAgCu)Assembly			Einheit Unit
		Minimum	Recommendation	Maximum	
Ramp-up Rate to Preheat 25°C to 150°C	-	-	2	3	K/s
Time t_s T_{Smin} to T_{Smax}	t_s	60	100	120	s
Ramp-up Rate to Peak T_{Smax} to T_p	-	-	2	3	K/s
Liquidus Temperature	T_L	217			°C
Time above Liquidus temperature	t_L	-	80	100	s
Peak Temperature	T_P	-	245	255	°C
Time within 5°C of the specified peak temperature T_p-5 K	t_p	10	20	30	s
Ramp-down Rate T_p to 100°C	-	-	3	6	K/s
Time 25°C to T_p	-	-	-	480	-

Note:

All temperatures refer to topside of the package, measured on the package body surface.

Dimensions For Cannulation And Packaging

Quantity: 1000PCS

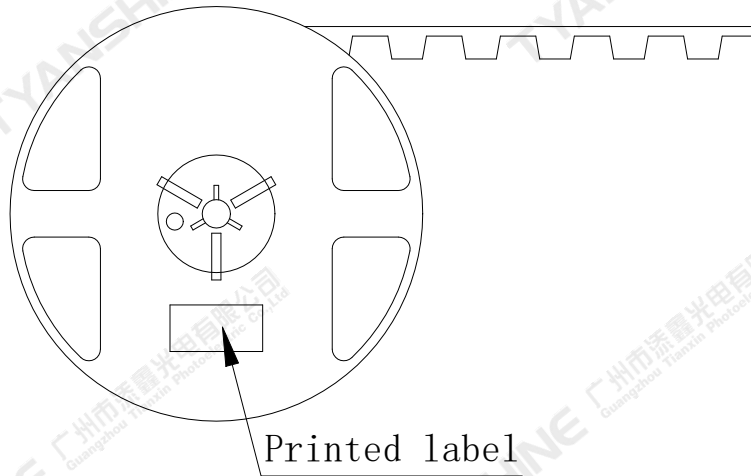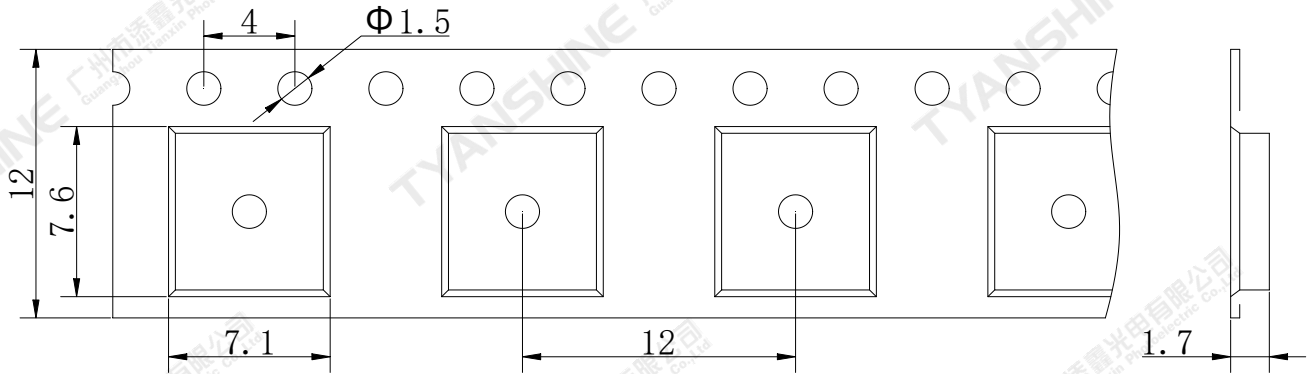

Notes:

1. All dimensions are in millimeters.
2. Tolerances are ± 2.0 mm unless otherwise noted.
3. The products are packaged together with silica gel, Transport, not to the weight of welding LED light-emitting area, As a result of the weight of LED light-emitting zone in the quality of, Irresponsible of the Company.

