

TX-1307SW08A-2760V39-10H90

PRODUCT SPECIFICATION

Features:

- ◆Excellent transiting heat from LED chip operating under 250mA.
- ◆Provide uniform cross distribution of positive white and warm white dual color scheme, mixed pure.
- ◆High luminous output.
- ◆No UV.
- ◆Encapsulated materials are environmentally certified and meet environmental requirements.

Chip Material:

- ◆GaInN

Emitting Color:


- ◆White
- ◆Warm white

Applications:

- ◆Commercial lighting
- ◆General Lighting

Part No.	TX-1307SW08A-2760V39-10H90	Spec No.	WKF-DA0065	Page	1 of 9
----------	----------------------------	----------	------------	------	--------

Package Dimensions:

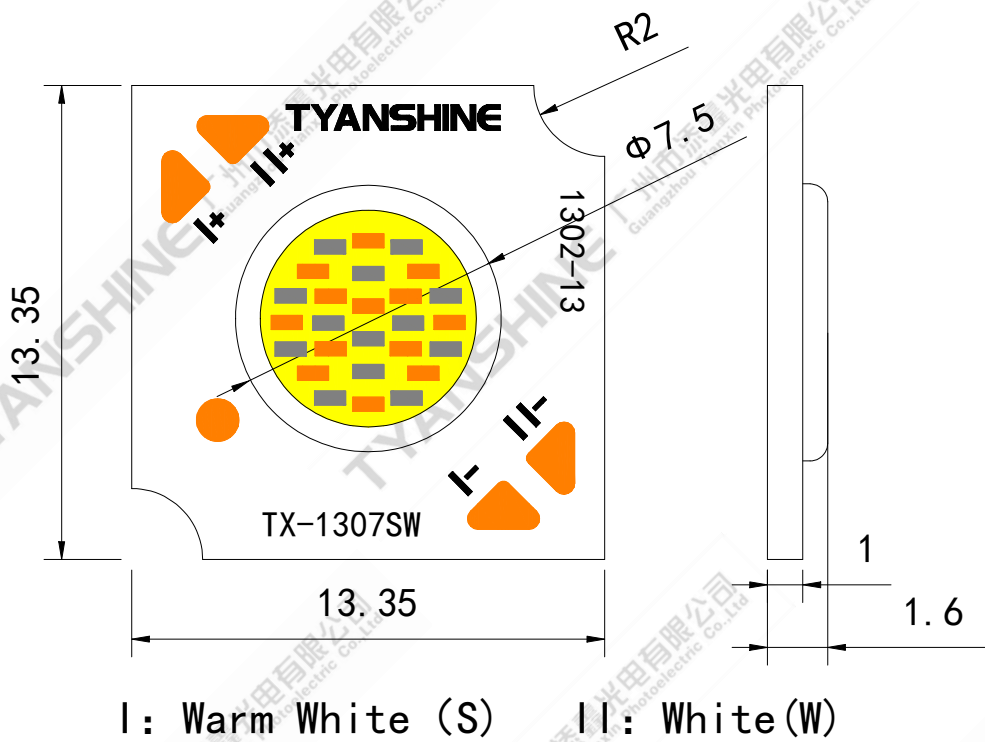

Notes:

- 1.All dimensions are in millimeters.
- 2.Tolerances unless otherwise mentioned are $\pm 0.25\text{mm}$.

Code Formats:

TX-1307SW08A-2760V39-10H90

TX	—	13	07	SW	08	A	—	2760	V39	—	10	H90
TYANSHINE	—	series	watt type	performance	LES	texture	—	CCT	VOL TS	—	BOM	Ra

Part No.	TX-1307SW08A-2760V39-10H90	Spec No.	WKF-DA0065	Page	2 of 9
----------	----------------------------	----------	------------	------	--------

Absolute Maximum Ratings

Parameter	Symbol	Ratings	Unit
Forward Current	IF	250	mA
Reverse Voltage	V _R	Not designed for reverse operation	V
Power Dissipation	P _D	S	W
		W	
		S+W	
Junction Temperature	T _j	S	℃
		W	
Case Temperature (C)	T _c	85	℃
Electrostatic Discharge Threshold (ESD)	ESD	2000	V
Storage Temperature	T _{stg}	-30~+100	℃
Operation Temperature	T _{opr}	-30~+85	

Notes:

- Specifications are subject to change without notice.
- The data on this specification is for reference only and the actual data is in accordance with the acknowledgment.
- Precautions for ESD:
STATIC SHIELD Electricity and surge damages the LED. It is recommended to use a wrist band or anti-electrostatic glove when handling the LED. All devices, equipment and machinery must be properly grounded.

Electrical Optical Characteristics (Tc=25°C)

Parameter	Symbol	Condition	Emitting color	Min.	Typ.	Max.	Units
Luminous Flux	ϕ_v	If=200mA	S	500	600	650	lm
			W	650	770	850	
Forward Voltage	V_f		S	36	38	40	V
			W	36	38	40	
Correlated Colour Temperature	CCT		S	2620	2700	2760	K
			W	5750	—	6600	
Viewing Angle at 50 % IV	$2\theta_{1/2}$		S	—	115	—	Deg
			W	—	115	—	
Reverse Current	I_R	—	—	—	—	μA	
Thermal Resistance Junction to Case	$R\theta_{J-C}$	—	—	—	4.57	—	K/W
Color Rendering Index	Ra	If=200mA	S	90	—	—	—
			W	90	—	—	

Notes:

- 1.Luminous intensity is measured with a light sensor and filter combination that approximates the CIE eye-response curve.
2. $\theta_{1/2}$ is the off-axis angle at which the luminous intensity is half the axial luminous intensity.
- 3.Luminous flux measurement tolerance: $\pm 15\%$.
- 4.Forward voltage measurement tolerance: $\pm 3\%$.
- 5.Ra measurement tolerance: ± 2 .


Typical Electrical/Optical Characteristics Curves



(25℃ Ambient Temperature Unless Otherwise Noted)



Forward Current VS. Relative Forward Voltage



Forward Current VS. Relative Luminous Flux

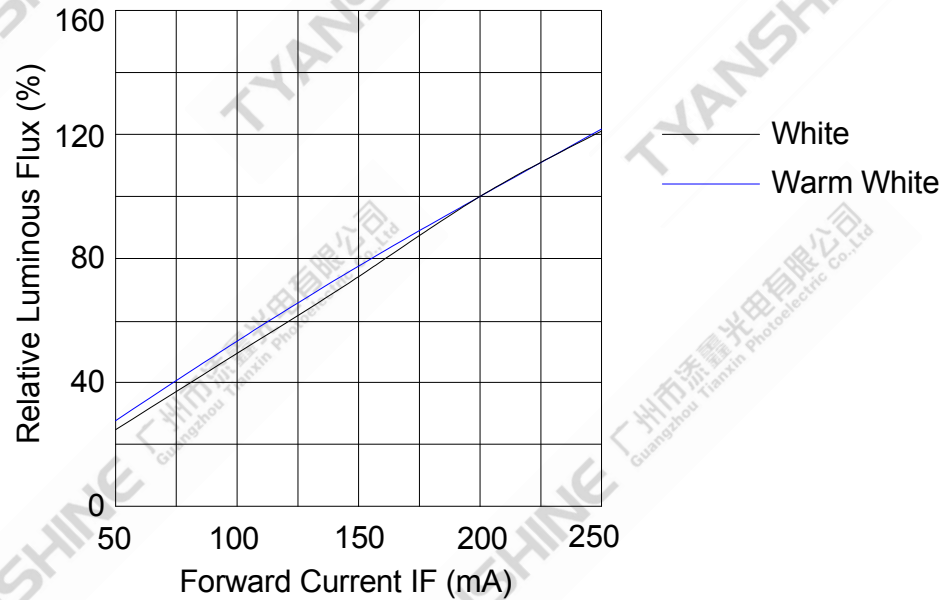

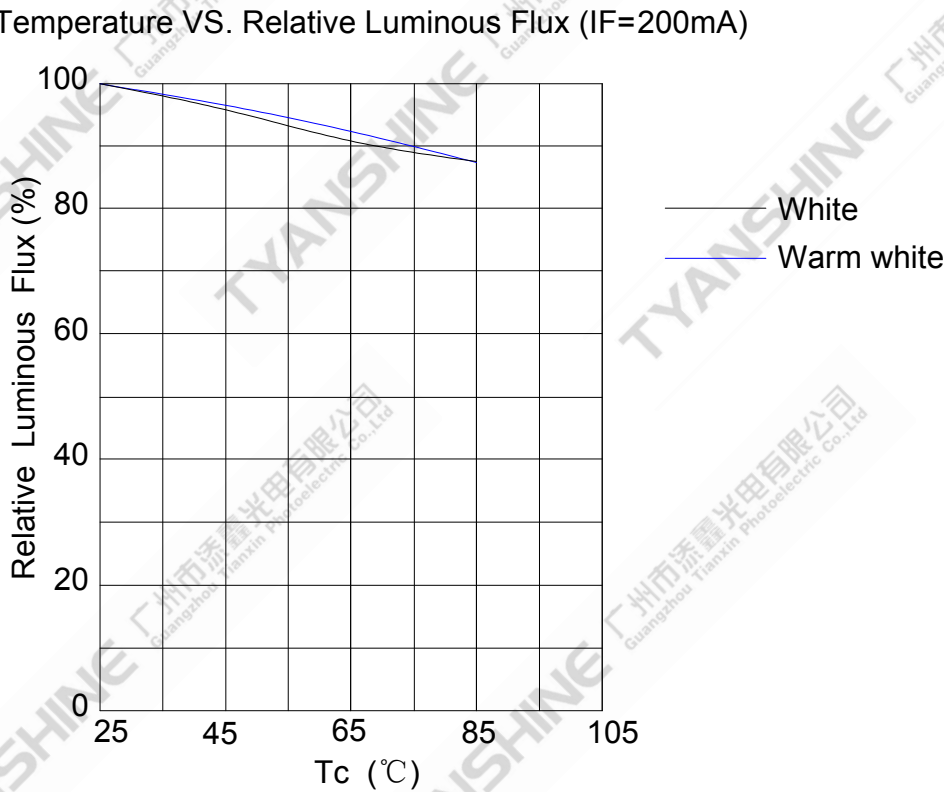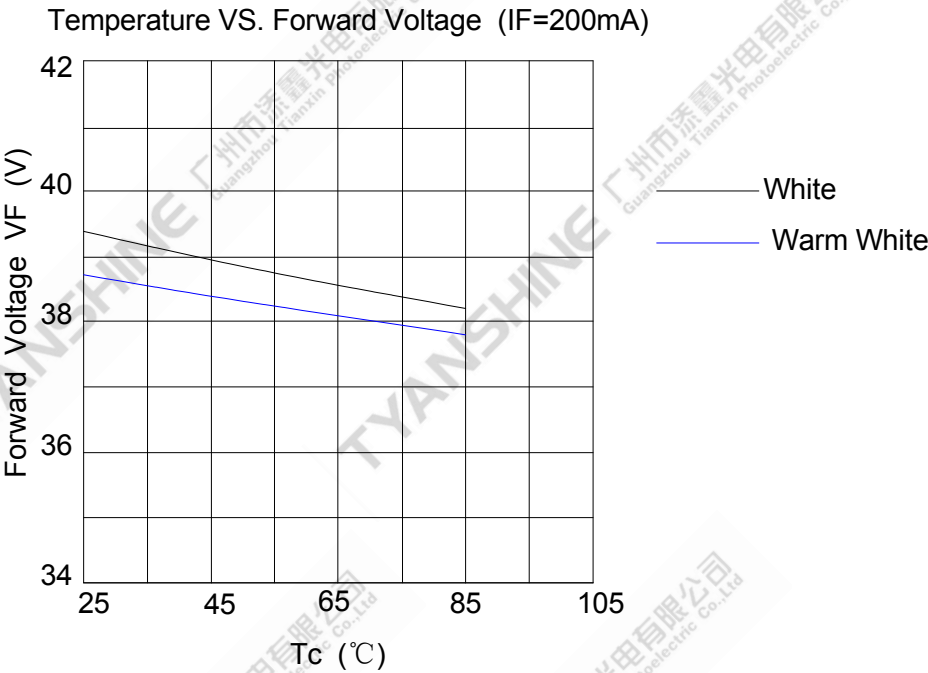


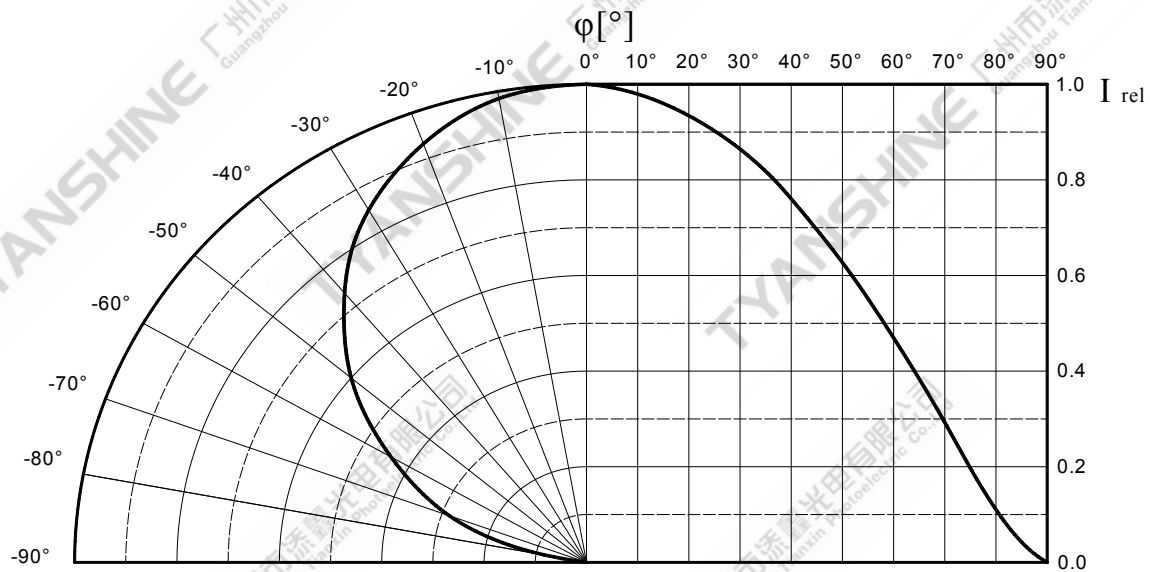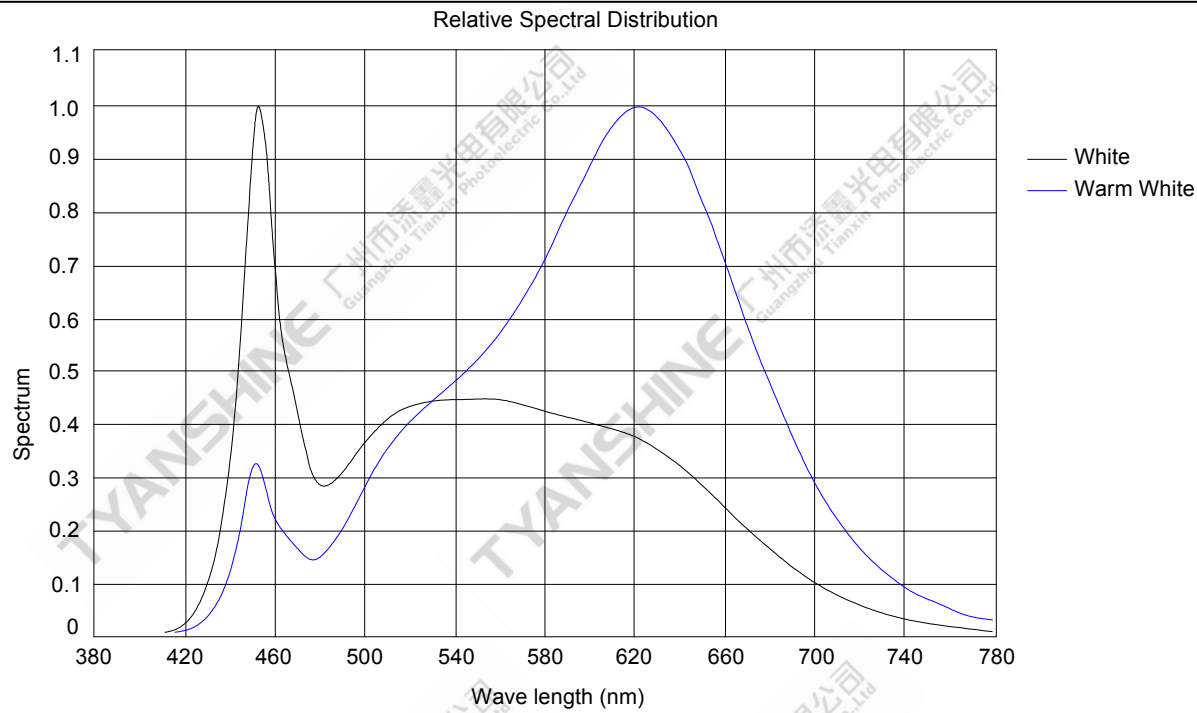

Notes:

1. $2\theta_{1/2}$ is the off axis angle from lamp centerline where the luminous intensity is 1/2 of the peak value.
2. View angle tolerance is $\pm 5^\circ$.

Chromaticity Coordinates （Condition:IF=200mA,Tc=25℃）

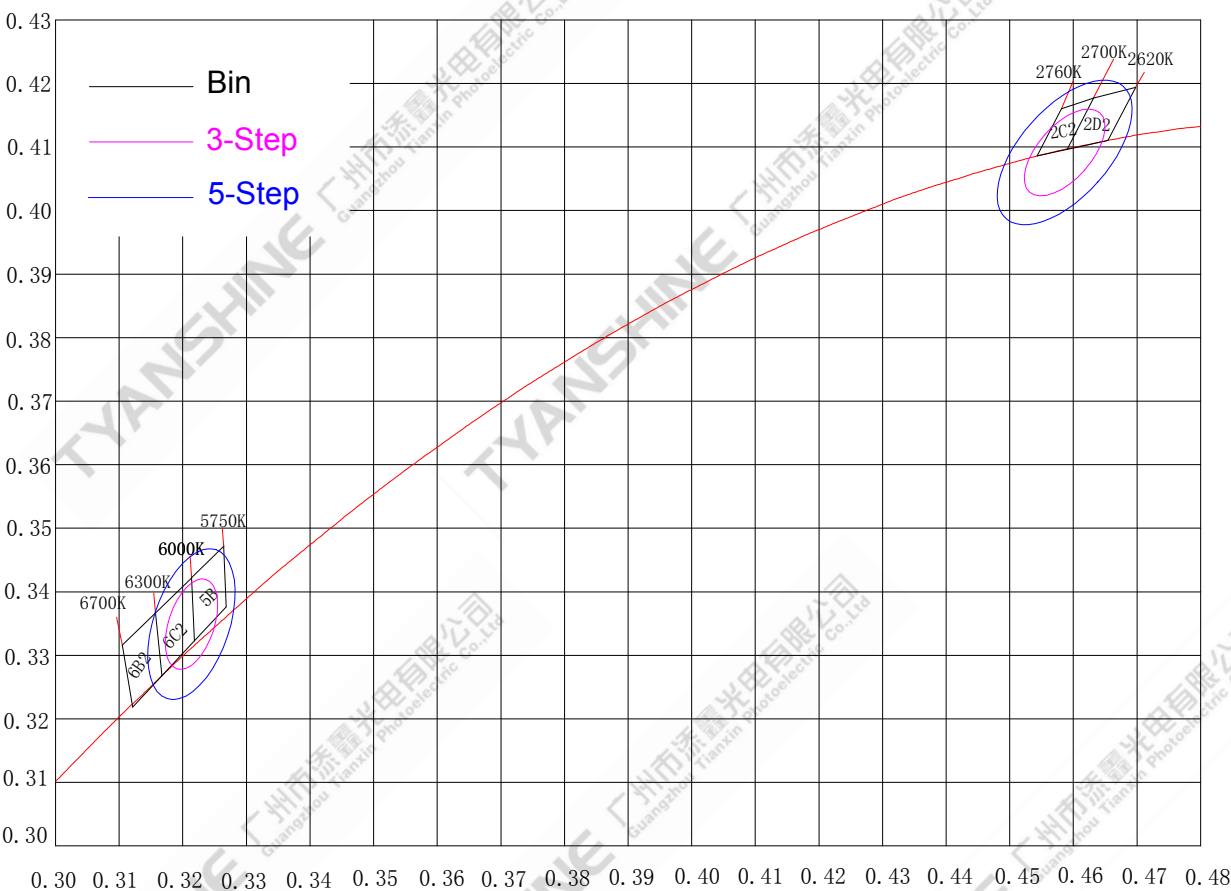

Notes:


1. Chromaticity (x,y) measurements tolerance: ±0.005.

Reliability Test

Test Item	Test Condition
Continuous Operation Test	IF=200mA Ta=25℃×1000hrs
Low Temperature Storage Test	-30℃×1000hrs
High Temperature Storage Test	100℃×1000hrs
Moisture-proof Test	85℃，85%RH for 500 hours
Thermal Shock Test	-30℃×30minutes-100℃×30minutes,100 cycle

Dimensions For Cannulation And Packaging

Quantity: 36PCS

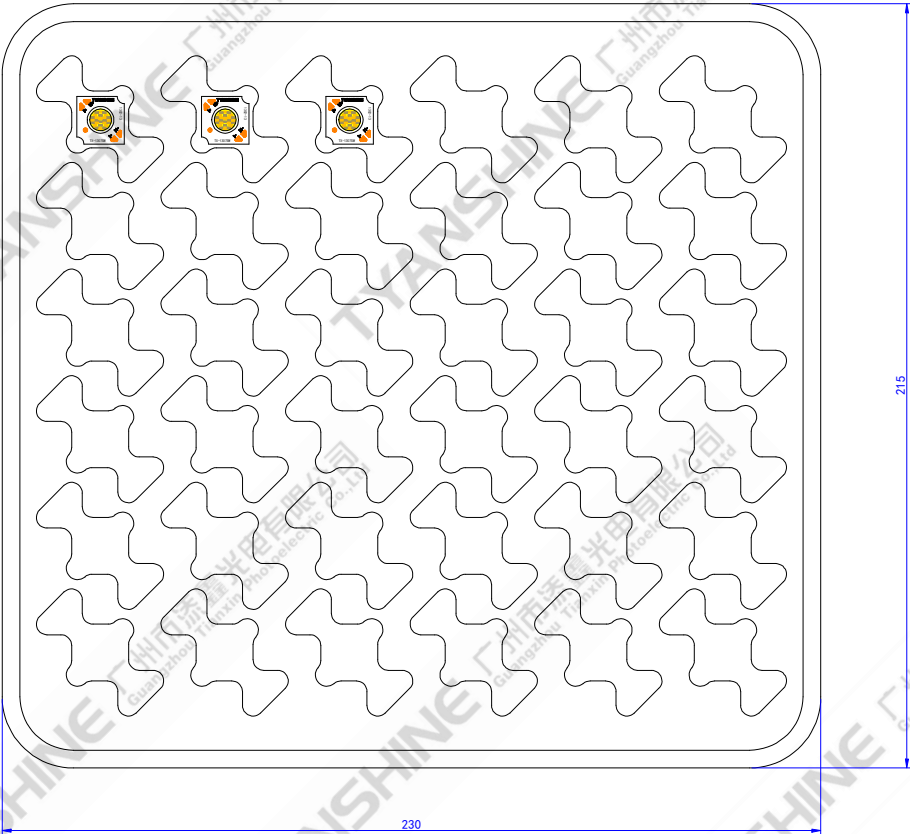

Notes:

1. All dimensions are in millimeters.
2. Tolerances are ± 2.0 mm unless otherwise noted.
3. The products are packaged together with silica gel, Transport, not to the weight of welding LED light-emitting area, As a result of the weight of LED light-emitting zone in the quality of, Irresponsible of the Company.